


TC 120



Categories: [Spindle Moulders](#), [T 120](#)

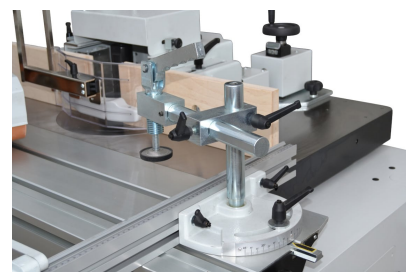

SPINDLE MOULDER WITH CARRIAGE TC 120

TECHNICAL DATA

Fixed working table dimensions	mm 640x1100
Aluminium sliding table dimensions	mm 360x1100
Available spindle diameters	mm 30-35-40-50
Max table opening	mm 350x80
Vertical stroke (spindle Ø 30-35)	mm 140
Vertical stroke (spindle Ø 40-50)	mm180
Working table height	mm 890
Spindle speed	rpm 2500/4200/6000/8000/10000
Motor power	HP 5,5
Weight	kg 640

STANDARD EQUIPMENT

- Spindle hood
- Angular cutting device
- Eccentric clamp
- 2 dust extraction hoods (1 x Ø 60 mm, 1 x Ø 120 mm)
- Manual star/delta switch

CE EQUIPMENT

- Spindle hood
- Fence with linear handling through hand-wheels and displacements displayed by decimal mechanical numerators. Scrolling on linear ball recirculation guides
- 2 dust extraction hoods (1 x Ø 80 mm, 1 x Ø 120 mm)
- Profiling spindle hood
- Rounding spindle hood
- Automatic star/delta switch
- Self-braking motor
- Spindle upstroke readout
- Readout for spindle speed
- Spindle protections CE type
- Electrical configuration for feeder