


T 120 EVO - TL 120 EVO



Categories: [Spindle Moulders](#), [T 120 EVO](#)

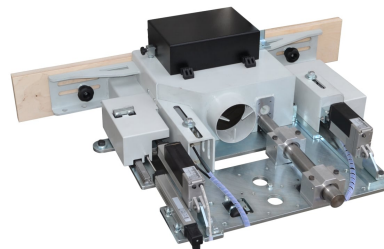

SPINDLE MOULDER T 120 EVO - TL 120 EVO

TECHNICAL DATA

	T 120 EVO	TL 120 EVO
Working table dimensions	mm 920x1100	mm 920x2300
Available spindle diameters	mm 30-35-40-50	mm 30-35-40-50
Max table opening	mm 350x80	mm 350x80
Vertical stroke (spindle Ø 30-35)	mm 140	mm 140
Vertical stroke (spindle Ø 40-50)	mm180	mm180
Working table height	mm 890	mm 890
Spindle speed	da rpm 800 a 10000 con inverter	da rpm 800 a 10000 con inverter
Motor power	HP 7,5	HP 7,5
Weight	kg 680	kg 780

CE EQUIPMENT

- Spindle hood
- Fence with linear handling through hand-wheels and displacements displayed by decimal mechanical numerators. Scrolling on linear ball recirculation guides.
- 2 dust extraction hoods (1 x Ø 80 mm, 1 x Ø 120 mm)
- CE protections
- Electrical configuration for feeder
- Reverse rotation
- Hanging control panel
- Movements managed by 8" touch screen control panel with manual, semi-automatic and automatic function.
- The control positions the tool according to the size of the tool.
- Motor start managed by inverter
- Variable speed from 800 to 10.000 rpm managed by control panel