
# ASTRA.60/6




**Categories:** ASTRA, Edge Banders

## AUTOMATIC EDGE BANDER ASTRA.60/6

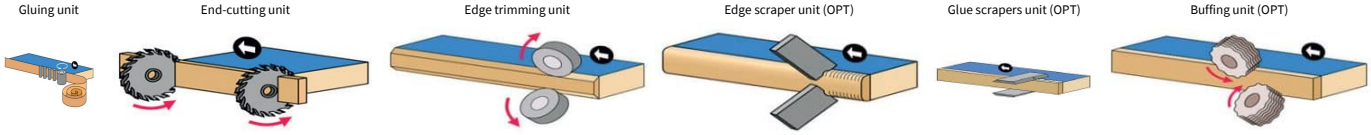


## TECHNICAL DATA

| | |
|---|---|
| Min width of the panel | mm 100 |
| Min length of the panel | mm 100 |
| Max thickness of the panel | mm 60 |

| | |
|---|---|
| Min thickness of the panel | mm 9 |
| Edge dim. in role min - max | mm 0,4 (min.) - mm 3 (max.) |
| Feed speed | m 1' 9,5 |
| Glue pot capacity | lt 2 |
| Installed power | kW 5,3 |
| Air pressure | Bar 7 |
| Weight | kg 810 |
| Length of the machine | mm 3420 |

## CE EQUIPMENT

- Tape roll holder table ø 700 mm
- Conveyor roller for wide panels
- 3 mm thickness roll edge cutter
- Manual movement of the upper pressure with digital readout
- Teflon pot
- Protection booth on all operation units
- Nr. 2 dust extraction hood ø 110 mm + nr. 1 ø 120 mm
- Operating units managed by PLC
- Quick release glue pot

## OPERATING UNITS

- **Gluing and edge pressure units**
  - Teflon pot / Glue spreading roller
  - Temperature controlled through the control panel
  - Glue pot with automatic stand-by of the temperature.
  - Nr. 1 rubbed pressure roller ø 70 mm ,2°,3° roller ø 55 mm
- **End-Cutting unit**
  - Nr. 2 HF tilting motors 12.000 RPM – kW 0,22 each
- **Fine-Trimming unit**
  - 2 HF motors kW 0,55 each
  - with digital readout