

ASTRA.50/6



Categories: [ASTRA](#), [Edge Banders](#)




AUTOMATIC EDGE BANDER ASTRA.50/6

Gluing unit

End-cutting unit

Edge trimming unit

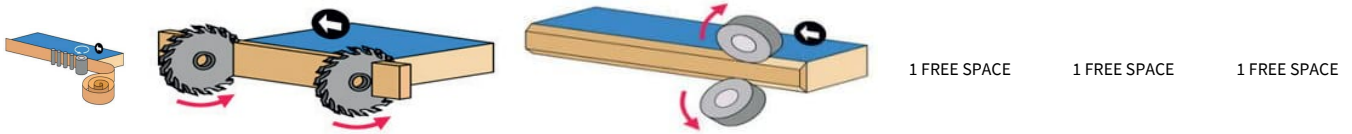

TECHNICAL DATA

Min width of the panel	mm 80
Min length of the panel	mm 210
Max thickness of the panel	mm 50
Min thickness of the panel	mm 12
Edge dim. in role min - max	mm 0,4 (min.) - mm 3 (max.)
Feed speed	m 1' 12
Glue pot capacity	lt 2
Installed power	kW 6
Air pressure	Bar 7
Weight	kg 700
Length of the machine	mm 2300

CE EQUIPMENT

- Tape roll holder table $\varnothing$ 750 mm
- Conveyor roller for wide panels
- 3 mm thickness roll edge cutter
- Manual movement of the upper pressure with digital readout
- Teflon pot
- Protection booth on all operation units
- Nr. 3 dust extraction hood $\varnothing$ 100 mm
- Touch screen control panel 7"
- Quick release glue pot

OPERATING UNITS

- **Gluing and edge pressure units**
 - Teflon pot / Glue spreading roller
 - Temperature controlled through the control panel
 - Glue pot with automatic stand-by of the temperature.
 - Nr. 2 pressure rollers $\varnothing$ 70 mm
- **End-Cutting unit**
 - Nr. 1 HF motor 12.000 RPM – kW 0,37
- **Fine-Trimming unit**

- 2 HF tilting motors kW 0,55 each
- with digital readout